

# DS Series Master Development System

## Quick Start Reference



### 1 Remove Contents




Remove the boards, antennas and batteries.

### 2 Set Up Boards



Install the antennas and batteries onto the boards.

### 3 Confirm Identical Switch Configuration

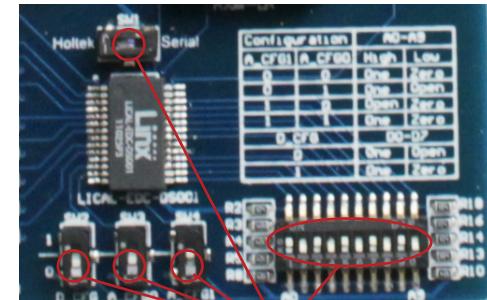

Switches


Check that the switch configurations on both the encoder and decoder boards are identical.

### 4 Turn On Power



Turn on the power to each board. The green LEDs should turn on.

### 4 Press Buttons on Encoder Board to Enable Decoder Board

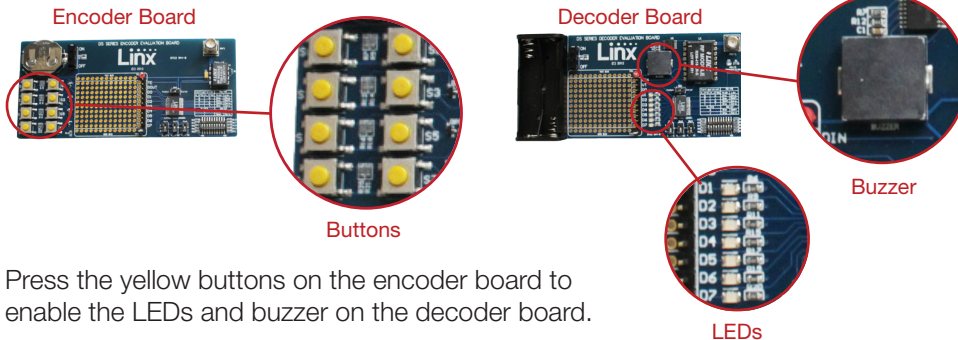

Buttons

Buzzer

LEDs

Press the yellow buttons on the encoder board to enable the LEDs and buzzer on the decoder board.

**Note:** For better performance, place the protocol select switch (SW1) to Serial mode (right hand position).